

Introducing...

Sport Weave™

Fitness Flooring

COPLEY TILE




OXFORD TILE




Applications

- Foyers
- Walkways
- Offices
- Weight Rooms
- Cardio Areas
- Group Cycling Areas
- Locker Rooms
- Childcare

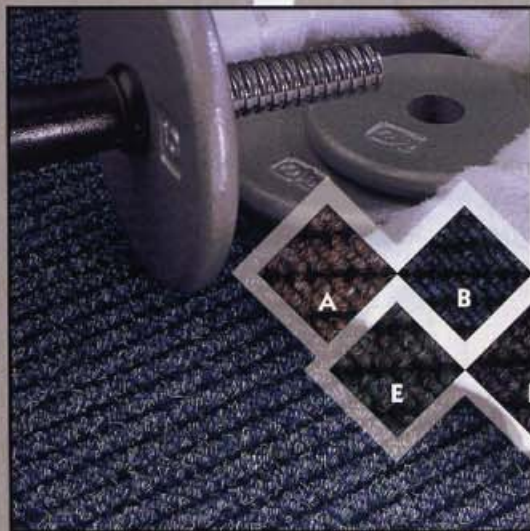

DOVER TILE

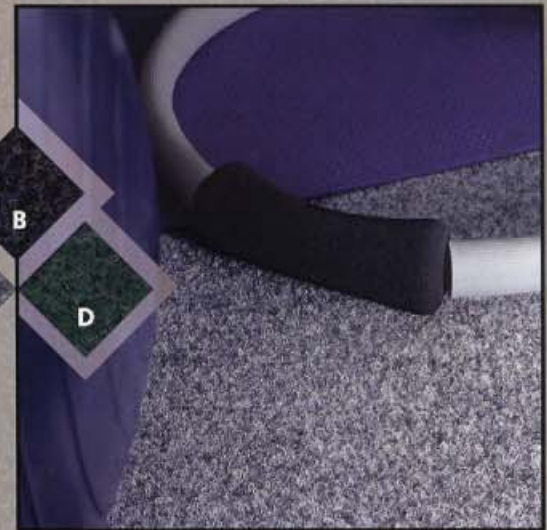

CONCORD TILE

Distributed by



A Revolution in Floor Safety

800-842-2914

dsafety@sbcglobal.net

www.diamond-safety.com

Why Sport Weave™?

1. Polypropylene fiber repels moisture, including sweat and food stains often found in cardio, spinning rooms, weight rooms, stretching areas and childcare facilities.
2. Polypropylene fiber is far more durable than traditional nylon carpet; it easily stands up to free weight and selectorized machines placed directly on it.
3. Move your machines around without dents or rust marks being left on your carpet.
4. Sport Weave™ Fitness Flooring is anti-microbial and fast drying, ideal for locker rooms.
5. Sport Weave™ Fitness Flooring will not rot, stain or mildew around water fountains, hot tubs or pools.
6. Sport Weave™ Fitness Flooring easily releases stains, and can be cleaned using standard shampooing methods.
7. Needle punch method of manufacturing allows flooring to be cut into patterns, curves, borders and logos without fraying.
8. Needle punching prevents flooring from zippering like standard tufted carpet, even when machines are dragged over it.
9. The backing on rolls and tile are waterproof.
10. Easy to install with inexpensive multipurpose adhesive.
11. Rolls and tiles don't need to be seamed, just butt together.

You can't find a **TOUGHER** floor!



Many Custom Colors Also Available!

SPORT WEAWE™ SPECIFICATIONS				
Description	Dover Tile	Copley Tile	Oxford Tile	Concord Tile
Composition	100% Solution-dyed UV stabilized Polypropylene fibers	100% Solution-dyed UV stabilized Polypropylene fibers	100% Solution-dyed UV stabilized Polypropylene fibers	100% Solution-dyed UV stabilized Polypropylene fibers
Weight	131 oz.	131 oz.	124 oz.	124 oz.
Thickness	3/8"	3/8"	5/16"	3/8"
Backing	Bitumen	Bitumen	Bitumen	Bitumen
Adhesive	Release-Bond Adhesive	Release-Bond Adhesive	Release-Bond Adhesive	Release-Bond Adhesive
Installation	Quarter-turn tiles	Quarter-turn tiles	Quarter-turn tiles	Quarter-turn tiles
Sizes	19 11/16" x 19 11/16"	19 11/16" x 19 11/16"	19 11/16" x 19 11/16"	19 11/16" x 19 11/16"
Case Pack	20 per case (53.8 sq. ft.) full cases only	20 per case (53.8 sq. ft.) full cases only	20 per case (53.8 sq. ft.) full cases only	20 per case (53.8 sq. ft.) full cases only
Custom	Also available in roll goods (minimums may apply)	Also available in roll goods (minimums may apply)	Also available in roll goods (minimums may apply)	Also available in roll goods (minimums may apply)

Warranty

Limited 7-year Abrasive Wear Warranty. Centaur Floor Systems offers a limited 7-year warranty for abrasive wear on indoor installation. Warranty requires product installation over a dry, smooth, hard, flat surface free of cracks and foreign substances. Products must be installed using the appropriate adhesives, or approved equal. Product must be maintained according to maintenance instruction.

Maintenance

Daily

Vacuum daily with a commercial grade vacuum cleaner that features a rotary power brush or beater bar. Product releases more soil when completely dry.

Periodic Maintenance

This product cleans beautifully with the use of a Hot Water Extraction machine.