

ROLLED RUBBER

100% RECYCLED & RECYCLEABLE

USE RB ROLLED RUBBER IN:



- WEIGHT ROOM FLOORING
- ASSEMBLY LINES
- HORSE & LIVESTOCK TRAILERS
- POOLS & GARDENS
- SUB-FLOOR PROTECTION
- ACOUSTIC UNDERLAYMENT
- BOAT DOCKS & RAMPS
- ANTI-FATIGUE
- HANDICAP ACCESSWAYS
- BASEMENTS
- RUNWAYS/WALKWAYS
- FOOT BRIDGES
- CARGO CONTAINMENT
- SKI LODGES
- SOUND PROOFING
- ENTRYWAYS
- GREEN BUILDING
- COMMERCIAL FLOORING
- HEAVY TRAFFIC AREAS
- CORRIDORS
- ICE RINKS

RB Rolled Rubber is suitable for both interior and exterior applications and is ideal for surfacing areas that require resilience, sound absorption and traction. The 100% recycled rubber natural color (contains a small amount of white flecs from passenger tire recycling) and the premium solid black rolls are also available with colored accent flecs in a range of colors. This line of rubber products has been specifically designed and manufactured for durability and yet offers an attractive appearance.

ENVIRONMENTALLY FRIENDLY

RB Rolled Rubber natural color and solid black products are manufactured of 100% post-consumer recycled rubber materials, namely scrap tires and a polyurethane binder. Because of this high level of reused material in each roll, RB Rolled Rubber meets and exceeds the requirements set forth in U.S. Executive Order 13101, Greening the Government and can be a contributing factor towards LEED Green Building Council certification. Each year, RB Rubber prevents over 3 million scrap tires from being landfilled.

TYPICAL PROPERTIES

Material	SBR bonded granular black recycled rubber with or without EPDM (a non-recycled Colored Rubber)
Thickness	2mm to 12mm (1/2")
Widths	4 feet (custom sizes up to 60" available)
Lengths	25, 50 and 75 feet (custom lengths available)
Colors	Natural, solid Black, Color in Blue, Red, Grey, Green and Blue/Grey Flec
Temp.Stability	-30°C up + 80°C in resting conditions
Tolerances	Thickness +/- 3%, Width +/- 1%, Length +/- 1%
Density	ASTM D-3676 60 +/- 5 lb/ft ³



DURABLE

RB Rolled Rubber offers superior durability. Specially formulated high strength binders, similar to those used in synthetic running tracks are used in its construction. The colored flec rolls are manufactured from premium recycled black rubber particles and colored EPDM rubber pieces.

SHOCK AND SOUND ABSORBING

RB Rolled Rubber services many needs at one time. It can be used in either outdoor or indoor applications and features resilient, shock, and sound absorbing qualities, excellent traction and anti-skid properties. The RB Rolled Rubber also serves as an effective buffer against acoustical vibration.

VERSATILE

Although custom sizes are available, standard thicknesses of 3mm (1/8”), 6.4mm (1/4”) and 9.5mm (3/8”) are stocked items. Call for available color, thickness and lengths.

AESTHETIC

RB Rolled Rubber is available in a variety of colors, natural and solid black. The colored particles are homogeneously distributed throughout the entire product in a uniform 17% standard mixture. The vibrant colors provide dramatic decorative interior design effects.

ANTI-FATIGUE RESILIENCE

RB Rolled Rubber is fabricated from thousands of tiny rubber granules and offers superior underfoot comfort and resilience. Its resilient properties cushion the shock from running, exercising, walking or standing.

EASY TO CLEAN

Indoor cleaning involves a broom, damp sponge mop or vacuum cleaner. Outside, a water hose, leaf blower or broom is sufficient. If desired, a mild detergent such as RB Cleaner can be used to sanitize the RB Rolled Rubber.

Tensile Strength	ASTM D-412	Minimum 300 psi
Elongation at Break	ASTM D-412	75% Minimum
Hardness	ASTM D-2240	Shore A:60 +/- 5
Tear Strength	ASTM D-624	80 lb/linear inch Minimum
Coefficient of Friction	ASTM D-1894	.980
Acoustic Rating	Superior - call for details	
Chemical Behavior	Resistant to water; resistant to numerous diluted acids and alkaline solutions. Chemically neutral.	


INSTALLATION

RB Rolled Rubber can be installed easily over nearly any smooth surface including concrete, asphalt, wood or tile. No special tools are required. Some applications may require adhesive to hold the rubber in place. Outdoor installations may require complete adhesion. For additional installation information, call 800-525-5530.

WARRANTY


RB Rolled Rubber is guaranteed to be free of manufacturing defects in material and workmanship for 2 years. For warranty details, call 800-525-5530.

RB Rubber Products, Inc. is a dynamic manufacturing company that sells high-quality, durable rubber mats and other protective surfaces and products made from recycled tires. For over 17 years, RB Rubber Products, Inc. has combined superior products with exceptional customer service to become one of the largest recycled rubber flooring manufacturers in North America.

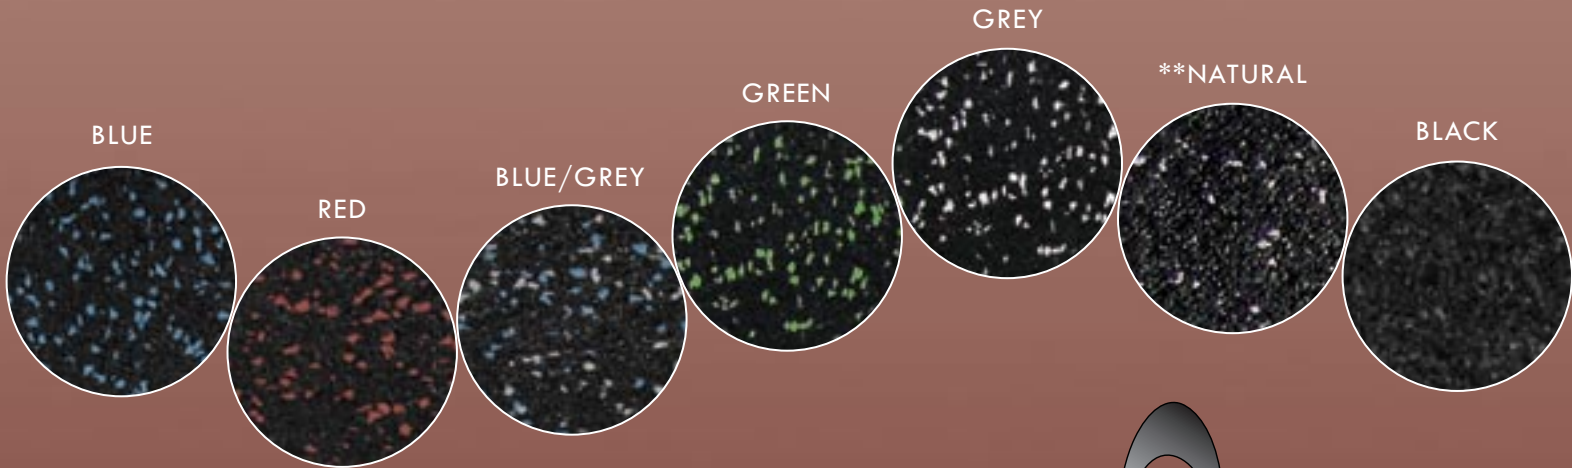

Color samples provided are for examples only. For close color matching, please request sample from the manufacturer. Custom combinations, density percentage and alternate colors are available with minimum purchase. Call RB for details.

** Natural mats have a small percentage of white flecks within the mat. Natural mats are manufactured using passenger tire rubber, which sometimes contain whitewall. Solid black mats are manufactured using entirely black recycled rubber.

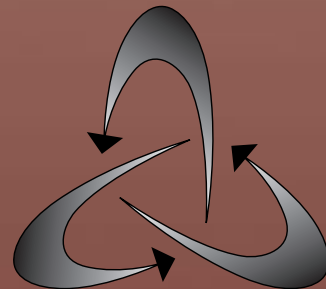

Recycled and Made in the USA

DISTRIBUTED BY:

RB **RUBBER PRODUCTS**
A Subsidiary of DASH MULTI-CORP

904 NE 10th Avenue, McMinnville, OR 97128

phone: 800-525-5530

fax: 503-434-4455 - sales@rbrubber.com

www.rbrubber.com