



ULTRA TUFF™

POOL/DECK & SURFACE COATING

Rubberized • Non-Skid

#1 in the Waterpark & Amusement Industry

Manufactured by Tuff-Coat®



Amusement Parks

THE IDEAL COATING FOR EVERY SURFACE

RELAX...you've made the right choice.



Spray Parks

Waterparks






Ideal Applications:

- Splash Pads
- Kiddie Pools
- Wave Pools
- Deck Surfaces
- Walkways
- Catch Pools
- Wet Rides
- Carnival Rides
- Restroom Floors
- Locker Room Floors
- Stairs
- Steps
- Ramps
- Food Prep
- Kiosks

I've applied a lot of deck coatings in my time, but Ultra TUFF is by far the easiest to apply and the customers really like it. We've had this product on decks for almost 10 years and it still looks great.

Scott O'Conner - President
Superior Coatings, Miami, FL



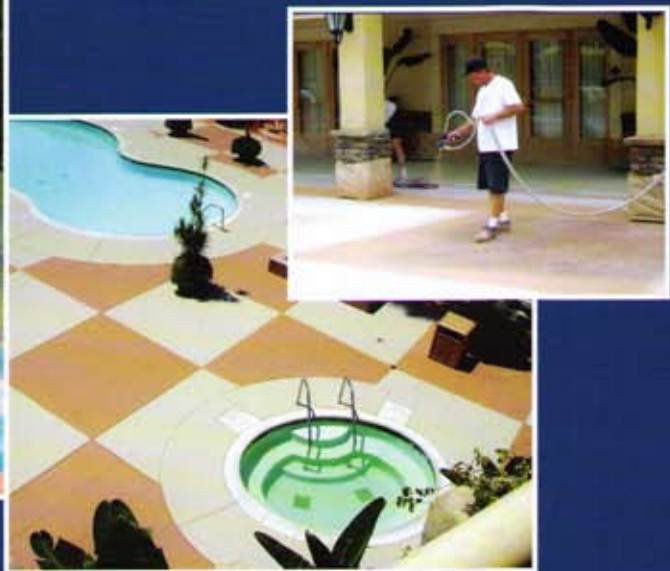

SIMPLE APPLICATION

"We had Ultra TUFF applied to all of our pool decks, and not only did it beautify the area, but we have had zero slip fall complaints."

Fran Mattinson - Director of Guest Relations
Welk Resort, CA

"We are on our 4th year using Ultra TUFF products in our pools and on our decks and I am very pleased with the durability and ease of use. I would highly recommend Ultra TUFF to anyone."

Dennis Perez - Maintenance Director
Raging Waters, CA

TUFF-COAT® PRODUCTS

PRODUCT	DESCRIPTION
UT-100	Rubberized Deck Coating
UT-100F (Flex)	Flexible Rubberized Deck Coating
UT-100AQ (Aqua)	Underwater Application for Pools, Ponds, Spas, Etc.
UT-100SR (Smooth Rubber)	Fine Textured - Rubberized Deck Coating
UT-100F SR (Flex - Smooth Rubber)	Flexible - Fine Textured - Rubberized Deck Coating
UT-100AQ SR (Aqua - Smooth)	Fine Textured - Underwater Application for Pools, Ponds, Spas, Etc.
Ultra Glow	Glow-in-the-Dark Rubberized Coating
UT-50 (50% Aggregate)	Available in F - Application for Exits, Stairs, Etc.
UT-14/UT-14 F (Coarse, Black Only)	Rubberized Coating - Available in F, AQ and SR
UT-25 (Non-Aggregate)	Heavy Industrial - Oil Rigs, Refineries, Ramps, Etc.
CC-100 (Clear Coat)	Coating - Available in F and AQ
	Clear Coating - Aggregate would be "Silicate"
	Application for Decorative Tile, Stamped Concrete, Stone Pavers, etc.
CP-10	Water-Based Primer for Concrete, Wood, Fiberglass
MP-10	Water-Based Metal Primer for Aluminum or Steel
Roller	Textured - Specifically Designed to Apply Ultra Tuff™ Coatings



"Ultra TUFF works very well on my ride surfaces and in the floors of my food kiosks. Best coating I've found in 25 years."

Tom Davis - Owner
Extreme Amusements, Nashville, TN



(AQ - Aqua - F - Flex - SR - Smooth Rubber - CP - Concrete Primer - MP - Metal Primer - CC - Clear Coat)

Prep on Raging Waters Wave Pool



Ultra TUFF™ Coatings are water-based, single-component products, created through a unique process of cross-linking urethanes, acrylics, and co-polymers, and utilizing recycled rubber crumb as an aggregate. These coatings are designed to provide an attractive, highly durable, impact-resistant, non-slip surface.

PERFORMANCE SPECIFICATIONS

- Water-borne
- Single pack
- UV-resistant
- Chemical-resistant
- Wide color range
- No VOCs or Isocyanates
- Easy to apply
- Environmentally-friendly
- Non-flammable
- Flexible

ADHESION CHARACTERISTICS

- Concrete
- Wood
- Treated Lumber
- Aluminum
- Steel
- Fiberglass
- Previously-Painted Surfaces

APPLICATION

Temperature: 40 degrees F minimum; 120 degrees F maximum (air, surface, and material)
 Relative Humidity: 85% maximum
 Method: Roll - TUFF-Coat® Rollers
 Spray - Superior Hopper Gun or Texture Sprayer

RECOMMENDED PRIMERS

Primer CP-10 by TUFF-Coat®: Concrete, Wood, Painted Surfaces, and Fiberglass
 Primer MP-10 by TUFF-Coat®: Metal

PACKAGING

1 Gallon - Weight: 12 lbs. • 5 Gallon - Weight: 54.0 lbs.
 Non-flammable, Non-hazardous, Non-HAZMAT
 No shipping restrictions required

CHARACTERISTICS

Finish: Matte finish
 Appearance: Textured colored liquid
 Recommended Spread Rate:
 Wet mils: 50-60
 Dry mils: 35-40
 Coverage: 40-45 Sq. Ft. in 2 coats
 Drying Schedule @ 20 mils wet @ 50% RH, 72 degrees F
 To touch: Approximately 1 hour
 To top coat: Approximately 1-2 hours
 To cure: Approximately 24 hours-5 days for full chemical cure
 Shelf-Life: 1 year
 Reducer: Water only
 Clean up: Water only


TESTING COMPLETED

- Impact Resistance (ASTM D-2794)
- Adhesion Testing (ASTM D-4541-95)
- Chemical Resistance
- Fire Resistance
- Mar/Scuff Resistance
- Wearing Data (ASTM F-510)
- Coefficient of Friction (ASTM F-609)
- UV Resistance
- Elongation - 400%
- Hot Tire Pick Up Test



ULTRA TUFF™ POOL AND DECK COLORS*

CUSTOM COLORS AVAILABLE AT NO EXTRA CHARGE

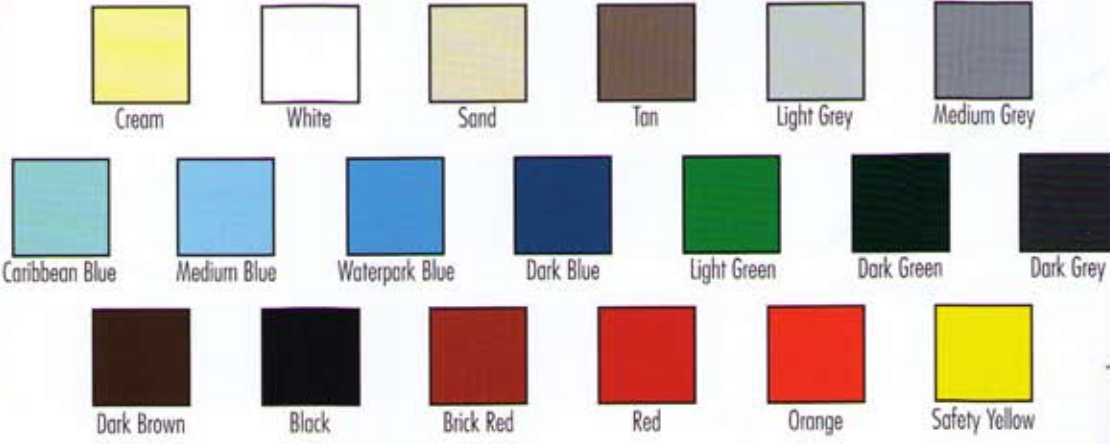

*Colors in this brochure are not exact, and may vary.




"Ultra TUFF has been a great product for coating our rigs and helipads. We're sold on it."

Jordan (Digger) Smith
Nabors Drilling, TX

"We've used Ultra TUFF on the tarmac walk areas of Logan International Airport, and plan on continuing to apply this product at American Airline terminals throughout the U.S. Good non-slip surface."

Ariel Gonzales
American Airlines

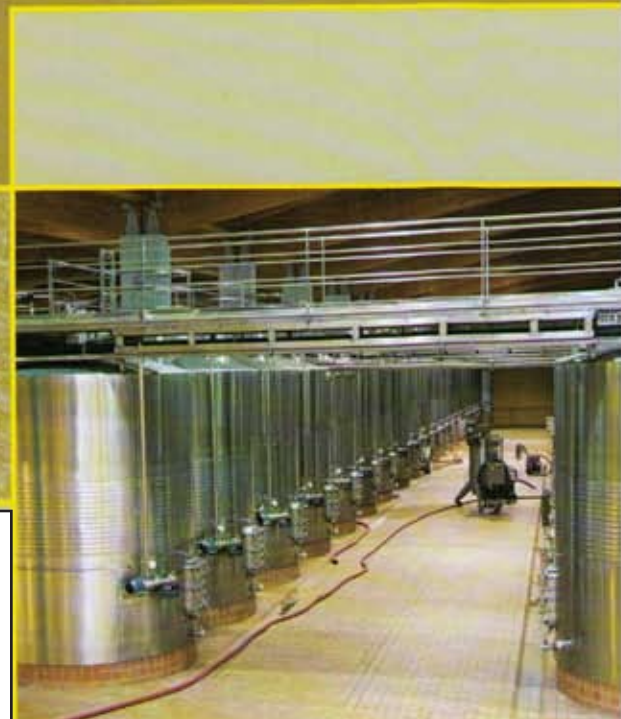

Distributed by



800-842-2914

dsafety@sbcglobal.net
www.diamond-safety.com

"I've used this product on the diamond plate foyer of our trains for six years and it appears to have held up very well. We will now continue with coating all of our trains."

Bill Hertwig - Coatings Engineer
Metro North Commuter Railroad



KEEPING SAFETY
AT YOUR FEET