




ULTIMATE TOUGH ZIP-TILES

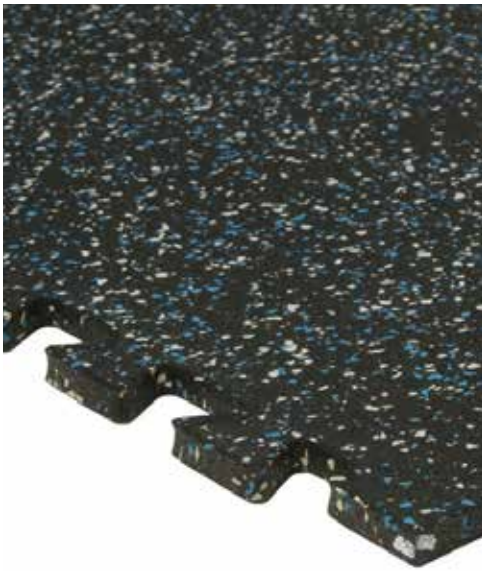

Ultimate Tough Zip-Tiles stand up to the demands of athletic facilities by providing superior durability, resilience, spike resistance, and traction.

- Recycled Rubber
- Slip Resistant
- Limitless Color Options
- Environmentally Friendly
- Design Flexibility
- Easy Installation
- Sound & Shock Absorbing
- Easy Maintenance
- FloorScore Certified

ULTIMATE TOUGH ZIP-TILES ARE GREAT FOR

HOME GYM FLOORING	STATIONARY BIKE MATTING	PHYSICAL THERAPY FACILITIES
SKI & SNOWBOARD SHOPS	RAMPS & INCLINES	SCHOOLS
WEIGHT ROOMS & GYMS	BASEBALL AREAS	LOCKER ROOMS
HEAVY TRAFFIC AREAS	ICE RINK WALKWAYS	MULTI-PURPOSE ROOMS

Flooring in athletic facilities must stand up to a variety of special demands ranging from the punishment of free weights to the shearing effect of ice skates. It must also provide noise reduction and a comfortable surface for the athletes. Recycled rubber flooring meets all these requirements. Ultimate Tough Zip-Tiles offer superior durability, resilience, sound absorption, spike resistance, and traction. These tiles are engineered so precisely that the intricate interlocking pattern nearly disappears as the tiles are installed. The unique tab design holds the tiles together securely without the need for expensive adhesives, tapes, or the labor to apply them. The Ultimate Tough Zip-Tiles can also be disassembled and re-assembled time and again without damaging the tiles. Zip-Tiles also offer great anti-fatigue qualities. Fabricated from fine rubber granules, their resilient properties give superior underfoot comfort to cushion the strain from running, exercising, and walking. On top of that, they are also very easy to clean.

Made From Recycled Rubber!



ULTIMATE TOUGH ZIP-TILE SPECIFICATIONS

TYPICAL PROPERTIES

TILE SIZES	TOLERANCE
<i>Interlocking</i> 28.5" X 28.5" (0.7239M X 0.7239M)	+/- 0.020"
*THICKNESSES	COLORED EPDM GRANULATE
<i>Standard:</i> 0.3125" (8MM) & 0.375" (9.5MM)	0.0394" (1MM) TO .1181" (3MM)
	BINDER
	POLYURETHANE

***CUSTOM AVAILABLE**

Ultimate Tough Zip-Tiles contain up to 92% recycled rubber material, manufactured in the USA in our ISO 9001 registered facilities, and are all covered by our Limited Warranties.


ZIP-TILE SPECIFICATIONS

TEST TYPE	ASTM	RESULT
SHORE HARDNESS	D-2240	65 +/- 5
DENSITY	D-792	60-80 LBS./CU.FT.
ELONGATION (AT BREAK)	D-412	95% - 120%*
TENSILE STRENGTH	D-412	260 - 340 PSI*
COMPRESSION SET	D-395	-4.8%
VOC EMISSIONS	D-5116	0.5 MG/M ² OR LESS
RESISTANCE TO CHEMICALS	F-925-02	NO CHANGE
STATIC LOAD LIMIT	F-970	PASSES, 150 PSI
DIE-C TEAR	D-624	80 MIN
SURFACE FLAMMABILITY	D-2859	PASS
COEFFICIENT OF FRICTION	D-1894-95	>0.8*

***VARIES BASED ON COLOR**

Note: Physical properties can vary by product type. Information above applies to this product only.

STANDARD COLORS

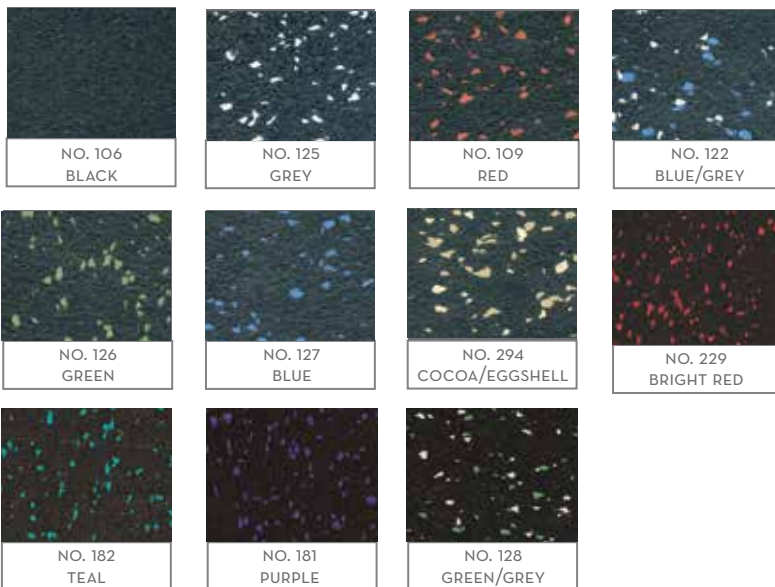

MAINTENANCE & FLOOR CARE

Maintenance and floor care depend on the desired appearance of the installed product and the type of equipment used to maintain the flooring. Use only Ultimate RB recommended cleaners, disinfectant, and neutral PH, non-petroleum products. Do not use harsh chemicals

WARRANTY

Ultimate Tough Zip-Tiles carry a 5-year limited warranty for defects in material and workmanship.

