




SofTILE Contained by SofRAMP

P.O. BOX 239, 4393 DISCOVERY LINE
PETROLIA, ONTARIO
N0N 1R0
PHONE: (800) 263-2363
PHONE: (519) 882-8799
FAX: (519) 882-2697
EMAIL: info@sofsurfaces.com

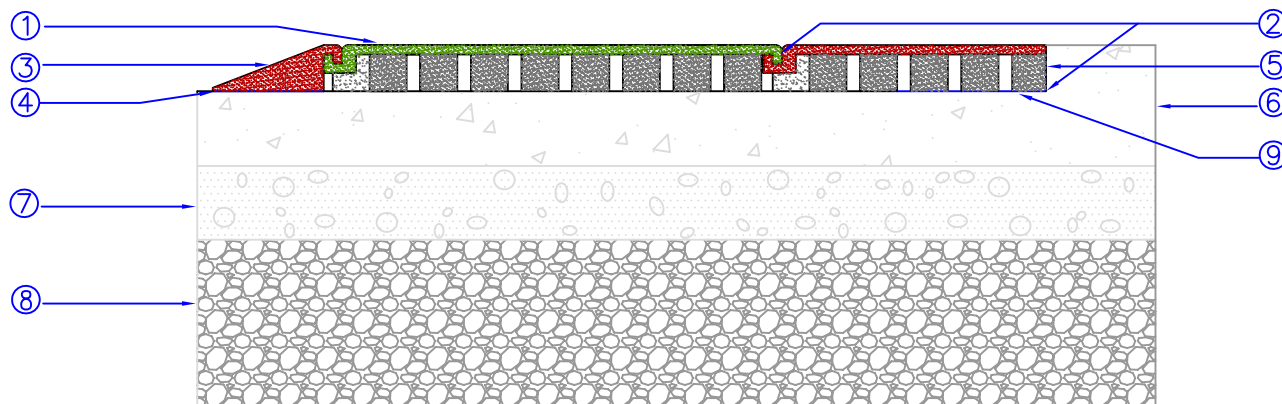

LEGEND:

- ① SofTILE® (See Specifications for Depth and Color).
- ② 1/2" Diameter Continuous Bead of SofTILE Adhesive at Each KrosLOCK Joint.
- ③ SofRAMP (ADA) or Standard SofRAMP Jr (See Specifications for Details).
- ④ Apply SofTILE Adhesive to Entire Bottom Edge and locking joint of SofRAMP.
- ⑤ Cut off "Lock" at any Retainer. Use Adhesive on the Retainer, and Under First 12" (300mm) of Perimeter Tiles.
- ⑥ Concrete or Asphalt Base and Curb (See Specifications for Depth and Details).
- ⑦ Compacted Granular A Type I
- ⑧ Compacted Subgrade.
- ⑨ 1.0% Slope - 1/8" / 12" (3mm / 300mm).

NOTES:

1. Consult with a local Civil Engineer to find out what drainage system is best for your application.
2. Ensure subsoil drains towards drainage system.
3. Review Most Recent Installation Manual and Sub Surface Guide

SofTILE Thickness	Critical Fall Height (FT)	FILE NAME SofTILE Contained by ramp		PREPARED BY B. GOSS	
2.00"	3'	REV 0 1	DESCRIPTION ORIGINAL ISSUE Updated	DATE 11/15/11 9/12/13	
2.25"	4'				
2.75"	5'				
3.25"	6'				
3.75"	7'				
4.25"	8'				
4.75"	9'				
5.00"	10'				
		SIZE A	SCALE N/A	DWG NO. 2012-024	REV 1