




SofTILE Contained by Curb with Ledge

P.O. BOX 239, 4393 DISCOVERY LINE
PETROLIA, ONTARIO
N0N 1R0
PHONE: (800) 263-2363
PHONE: (519) 882-8799
FAX: (519) 882-2697
EMAIL: info@sofsurfaces.com

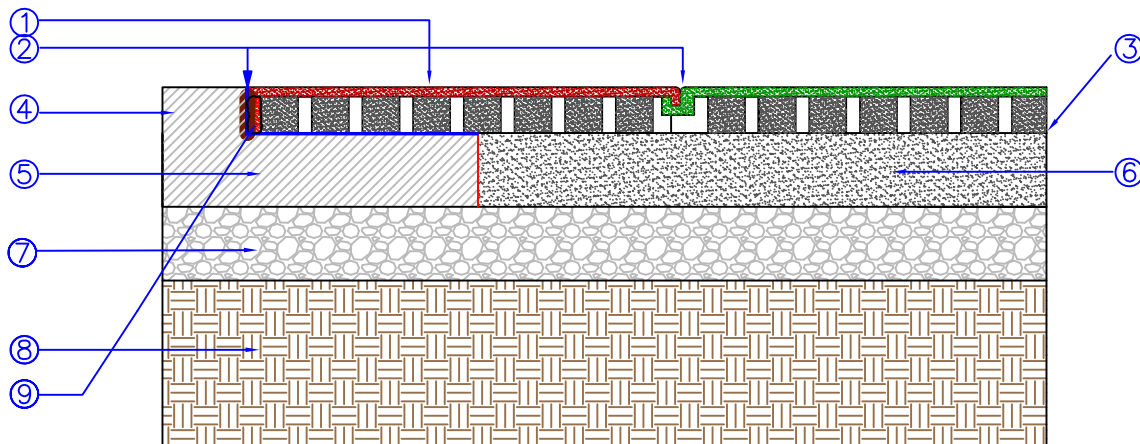

LEGEND:

- ① SofTILE® (See Specifications for Depth and Color).
- ② 1/2" Diameter Continuous Bead of SofTILE® Adhesive at Each KrosLOCK Joint.
- ③ 1.0% Slope - 1/8" / 12" (3mm / 300mm).
- ④ Containing Sidewalk
- ⑤ Concrete Ledge
- ⑥ Asphalt Sub Surface
- ⑦ Compacted Aggregate
- ⑧ Compacted Subgrade.
- ⑨ Expansion Foam (polyurethane-based) - Great Stuff Window and Door or Equal.

NOTES:

1. Consult with a local Civil Engineer to find out what drainage system is best for your application.
2. Ensure subsoil drains towards drainage system.
3. Review Most Recent Installation Manual and Sub Surface Guide

SofTILE Thickness	Critical Fall Height (FT)	FILE NAME SofTILE Contained by Curb with Ledge		PREPARED BY B. GOSS	
2.00"	3'	REV 0 1	DESCRIPTION ORIGINAL ISSUE Updated	DATE 8/9/12 9/12/13	
2.25"	4'				
2.75"	5'				
3.25"	6'				
3.75"	7'				
4.25"	8'				
4.75"	9'				
5.00"	10'				
5.75"	12'	SIZE A	SCALE N/A	DWG NO. 2012-032	REV 1