

THINK OF IT AS A FLOOR WITH MUSCLE.



MITCHELL

RUBBER PRODUCTS, INC.

Best Flex Flooring™

Fitness Surfacing



BEST FLOORING BASIC ARCHITECTURAL SPECIFICATIONS

Stock #	Description	Size	Approx. Weight
BF-4	Center Block	4 Sq Ft	12.0 lbs.
BF-3	Corner Block	3 Sq Ft	8.5 lbs.
BF-2	Boarder Block	2 Sq Ft	6.0

Color-Various Finish Pebble Grain Approximate Size 24" X 24" X 7/16"

- *Blocks must be high pressure molded as manufactured by Mitchell Rubber Products, Inc. Mira Loma, California.
- *Blocks must have staggered interlock every 12" to help prevent disengagement.
- *Interlocking blocks functional at any 90-degree angle.
- *Blocks must have life expectancy warranty against wear of ten years.
- *Blocks have beveled border where required – full 12" border.

TEST METHODS


- *Shore A durometer ASTM D2240
- *Co-efficient of Friction; "British Portable Skid Resistance Tester" ASTM E 303
- *Compression Recovery ASTM 545
- *Abrasion Resistance – Taber Abrader using CS-17 wheels under a pressure of 1000 grams.



**Carpet Saver
Protective Dumbbell Mat.**

SUMMARY OF TESTS

- *Shore A Durometer 55 at 70 degrees F.
- *Wet-Dynamic – not less than 30.
- *Tensile Strength – not less than 890psi
- *Shrinkage not to exceed 1.1% after 7 days oven aging
- *Compression and Recovery – not less than 90%.
- *Abrasion Resistance – weight loss: grams per revolution 0.0011.
- *Specific Gravity – 1.52.
- *Percentage Elongation – 510%.
- *300% Modulus (psi) – 575 psi.

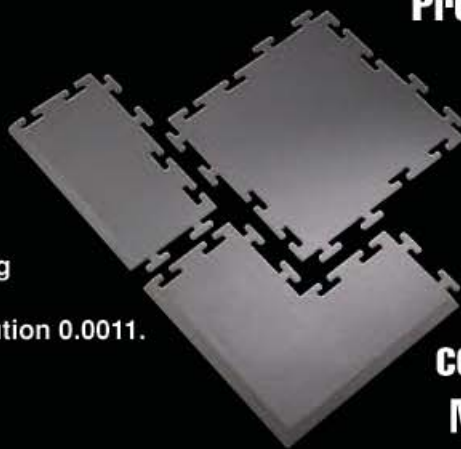

**Only three pieces to
complete any installation!
No adhesive necessary.**

Black

Grey

Khaki

Bergundy

Royal Blue

Terra Cotta

Brilliant Red

Dust Blue

Brown



*Due to the nature of rubber, color shade may vary +/- 5%

MITCHELL
RUBBER PRODUCTS, INC.

Distributed by



800-842-2914

dsafety@sbcglobal.net
www.diamond-safety.com