


Durability...Hit After Hit.



Diamond Mega Plate™

- Easy Installation & Requires No Adhesive
- Solid Wear Color Top to Bottom
- Vulcanized Virgin Rubber for Triple Strength & Wear Resistance
- Non-Porous and Easy Cleaning
- Mega-Sized Seamless Tiles

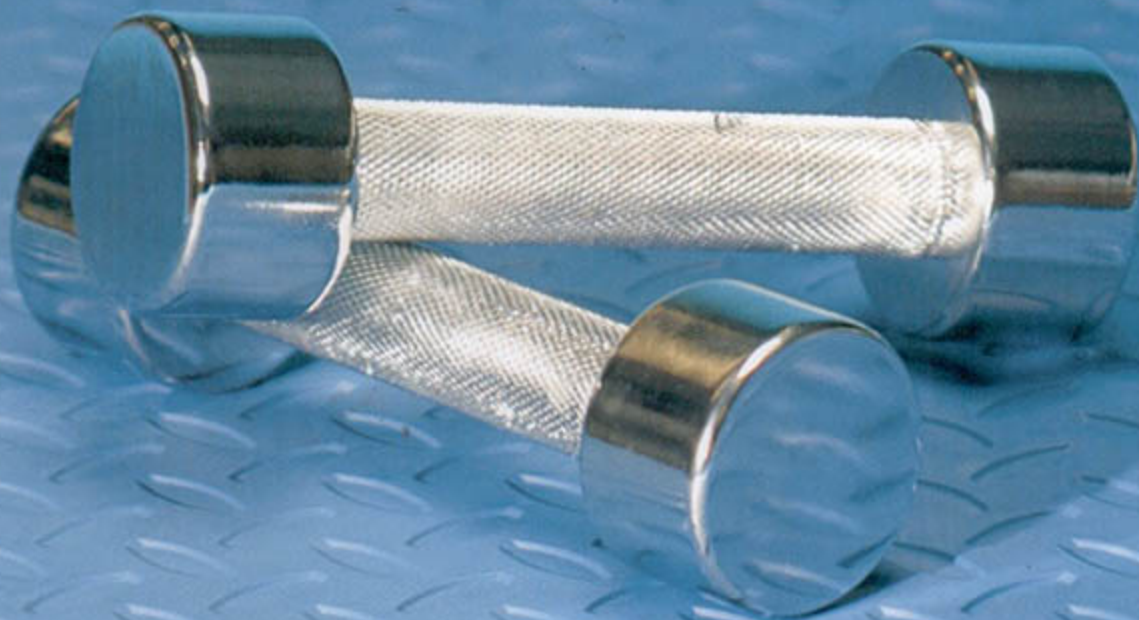


MITCHELL

RUBBER PRODUCTS, INC.

Diamond Mega Plate™

Diamond Mega Plate™ BASIC ARCHITECTURAL SPECIFICATIONS

Description	Approx. Size	Weight
Diamond Mega Plate	16 Sq Ft	50.0 lbs.

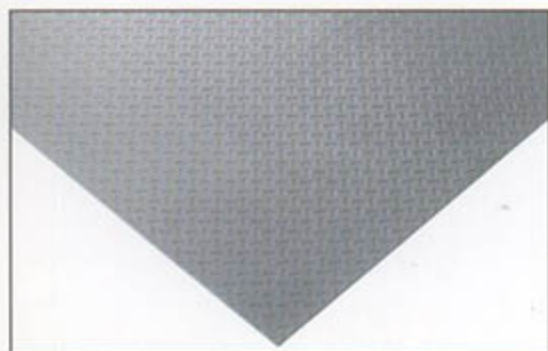

- Unique 4' x 4' seamless large format tile
- Low to No odor
- Dual Side Texture (upon request)

Can also be used in other athletic applications:

- Ice-Rink off ice Applications
- Golf Pro Shop and Walk-Ways
- Locker Rooms
- Animal Care Facilities
- Trade Show Booths

TEST METHODS

- Shore A durometer ASTM D2240
- Co-efficient of Friction; "British Portable Skid Resistance Tester" ASTM E 303
- Compression Recovery ASTM 545
- Abrasion Resistance – Taber Abrader using CS-17 wheels under a pressure of 1000 gram

SUMMARY OF TESTS

- Shore A Durometer 55 at 70 degrees F.
- Wet-Dynamic – not less than 30.
- Tensile Strength – not less than 890psi
- Shrinkage not to exceed 1.1% after 7 days oven aging
- Compression and Recovery – not less than 90%.
- Abrasion Resistance – weight loss: grams per revolution 0.0011.
- Specific Gravity – 1.52.
- Percentage Elongation – 510%.
- 300% Modulus (psi) – 575 psi.
- Tear Die "E" (psi) – 153 ppi.



Standard Color Line

Black Grey Dust Blue

Architectural Color Line

Brown Brilliant Red Royal Blue Terra Cotta Burgundy Khaki Green



Due to the nature of rubber, color shade may vary +/- 5%

* No more than 5% post industrial material

MITCHELL
RUBBER PRODUCTS, INC.

PH: 1-800-453-7526 Fax: 951-681-1479

10220 San Sevaine Way, Mira Loma, CA USA 91752

www.mitchellrubber.com