


No. 800 Lo-Disc Stair Tread

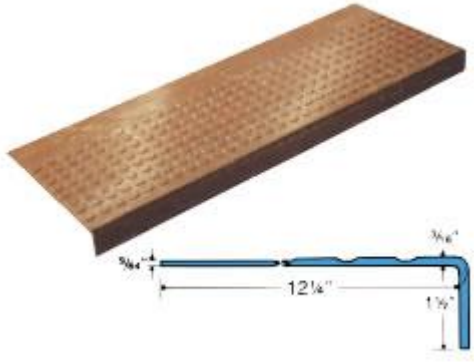

Our Lo-Disc Stair Tread has the ever popular round disc design in a lighter gauge stair tread. Lo-Disc Stair Treads have tapered 3/4" discs, raised .025"; are easier to keep clean. An economical, attractive long wearing resilient rubber stair tread with added weight at the front edge; excellent for lighter traffic stairways. Meets Federal Specs. RR-T-650E and ZZ-T-001237 (GSA-FSS). Install with Musson #400 Neoprene Contact Adhesive , No. 300 Water-based Contact Adhesive or #560 Rubber Flooring Adhesive; use #110 Epoxy Nose Caulk for longer wear and added safety.

Adds safety and durability, lessens traffic noise and offers ease of cleaning on stairways in clubs, apartments, churches, motels, stores, institutions, medical offices, bowling lanes and factories.

SPECIFICATIONS:

Furnish and install No.800 Lo-Disc Design Stair Treads from Musson Rubber, Akron, Ohio; 3/16" thick, tapering to back edge, 12-1/4" deep. Treads shall have a 1-1/2" square nose; a Flame Spread Rating of 75 or less using ASTM-E-84 Test; a sanded back to assure proper adhesion; contain no asbestos fiber; molded of top quality homogeneous rubber compound, color extending throughout thickness; free from objectionable odors, blisters, cracks, or imperfections which might impair serviceability. Select standard length of 36", 42", 48", 54", 60" or 72"; Select standard color from Color Series I, Color Series II, or Color Series III.

Grit Strip Lo-Disc Tread No. GS800




Available with two 3/4" wide, long wearing mineral coated Grit Strips recessed the full length of the tread at impact area. Helps prevent slipping. Design surface with Grit Strips offer added safety and longer wear. All treads have color through entire thickness. All treads meet Flame Spread Rating of 75 or less using ASTM-E-84 Test.

SPECIFICATIONS:

Furnish and install No. GS800 Molded Rubber Grit Strip Lo-Disc Design Stair Treads from Musson Rubber Co. 3/16 " thick; 12-1/4" deep; with 1-1/2" square nose. Two black* 3/4" wide abrasive Grit Strips inlaid in tread, 1" from front edge. Treads shall have a sanded back for proper adhesion; contain no asbestos; molded to top quality homogeneous rubber compound; free of objectionable orders or imperfections which might impair service. Select standard length of : 36", 42", 48", 54", 60" or 72". Select standard color from Color Series I, Color Series II or Color Series III. Curved Nose available only in Color Series I.

- Grit Strip inserts are also available in Brown, Gray, Beige, Safety Yellow or Safety Red at an extra cost.

Grit Strip Lo-Disc Tread No. GS800VI

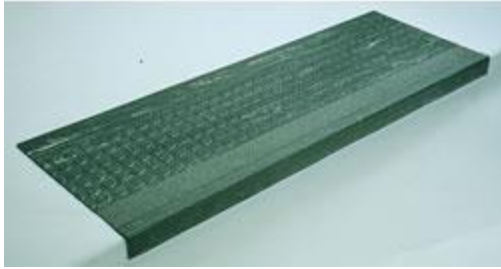


Available with 2" wide, long wearing mineral coated Grit Strips recessed the full length of the tread at impact area. Helps prevent slipping. Design surface with Grit Strips offer added safety and longer wear. All treads have color through entire thickness. All treads meet Flame Spread Rating of 75 or less using ASTM-E-84 Test.

SPECIFICATIONS:

Furnish and install No. GS800VI Molded Rubber Visually Impaired Grit-Strip Lo- Disc Design Stair Treads from Musson Rubber Co., 3/16" thick; 12-1/4" deep; 1-1/2" square nose. One Black* 2" wide abrasive Grit-Strip inlaid in tread, 1" from front edge. Treads shall have a sanded back for proper adhesion, contain no asbestos; molded of top quality homogenous rubber compound; free of objectionable odors or imperfections which might impair service. Select standard length of: 36", 42", 48", 54", 60" or 72". Select standard color from Color Series I, Color Series II or Color Series III.

- Grit Strip inserts are also available in Brown, Gray, Beige, Safety Yellow or Safety Red at an extra cost.

Color Series I

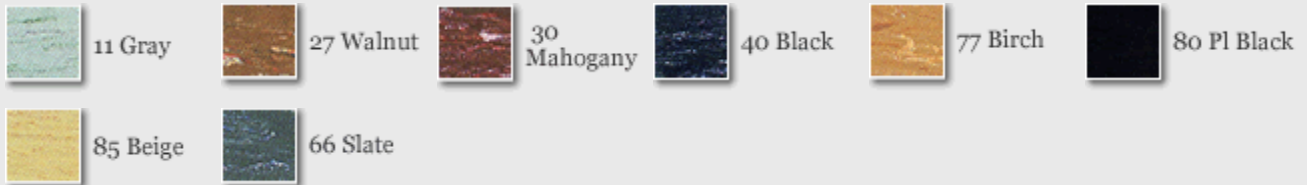

All colors must be selected from actual samples

Color Series II



All colors must be selected from actual samples

Color Series III



All colors must be selected from actual samples