


# SofTILE

## Walkway Pads

A safe, simple, and economical utility surface that protects your roofing investment year after year in all weather conditions.

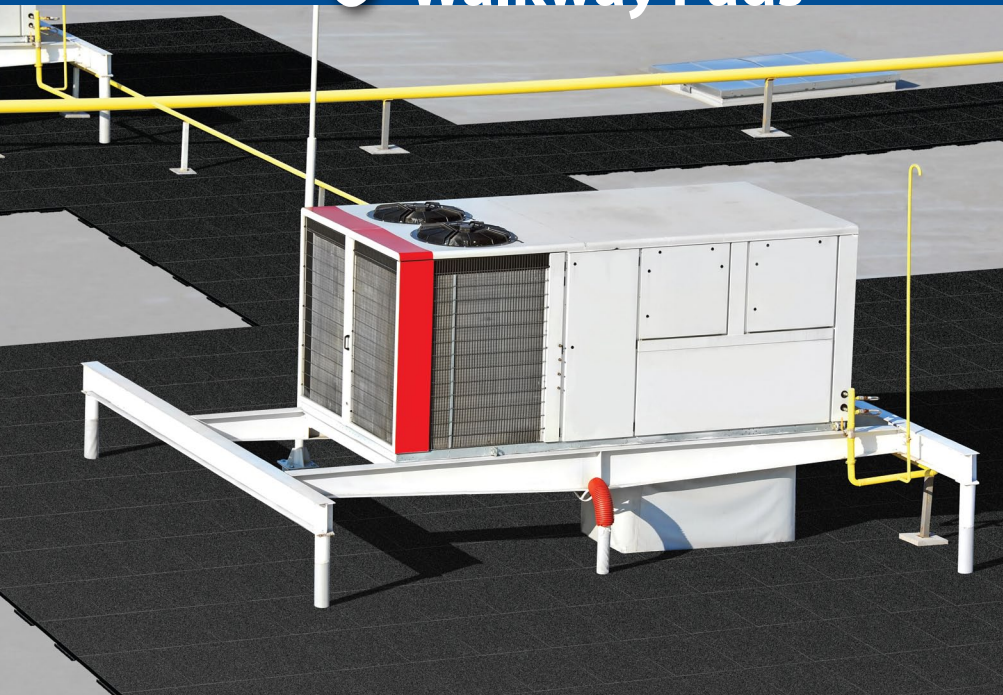

SofTILE Walkway Pads are an ideal option for membrane protection in all high-traffic areas, including access doors, roof hatches, HVAC units, and anywhere access is needed to service rooftop equipment. The pads interlocking design connects all tiles together ensuring that they stay in place while increasing ease and speed of installation. By utilizing 100% recycled rubber, SofTILE Walkway Pads provide an extremely durable and economical option to protect your roof from damage due to traffic and maintenance work. Compatible with most new and existing roof installations, SofTILE Walkway Pads are resistant to cracking, shifting and heaving.

### High-Density Top Layer:




- Performance proven in the harshest climatic conditions
- Excellent traction in all weather conditions

### U-Shaped Locking Design:

- Connects all tiles together to form a solid uniform pad
- Easy to transport and install

### Built-In Pedestal Design:

- Raises the paver off of the roof membrane providing excellent multi-directional drainage
- Provides unparalleled cushioning, impact resistance and shock absorption from foot traffic, tool drops and accidental penetrations

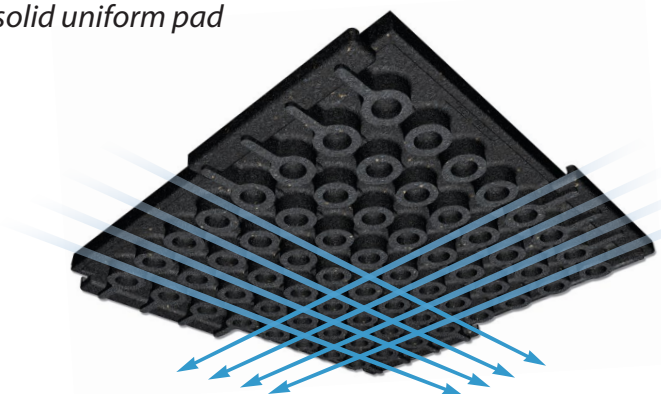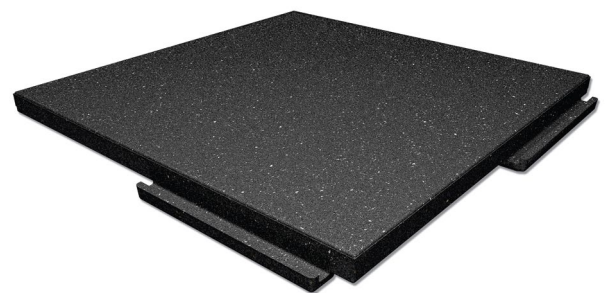

MULTI-DIRECTIONAL DRAINAGE


# SofTILE

## Walkway Pads

### TECHNICAL SPECIFICATIONS



#### SofTILE Walkway Pads Application Cross-section

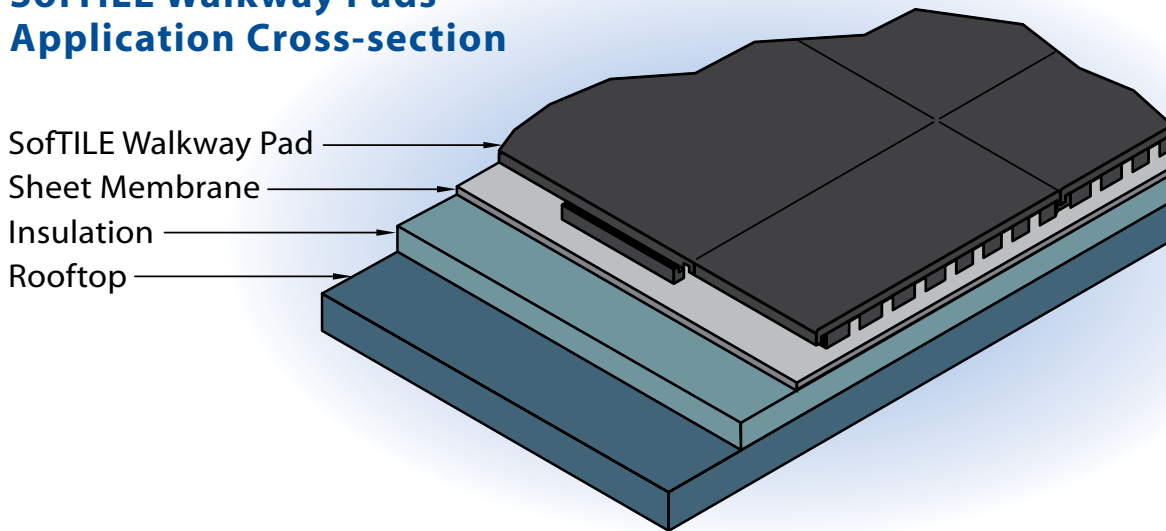

#### PHYSICAL PROPERTIES

Test Description	ASTM Ref.	Results	Test Lab	Test Date
Freeze Thaw	C67	No Change	Element	08-12
Rubber Deterioration/Air Oven	D573	No Change	Element	08-12
Abrasion Resistance	C501	205	DTL	04-12
Density	D3676	817 kg/m3	DTL	04-12
Slip Resistance	E303	44 Wet / 51.25 Dry	QAI Laboratories	04-12
Slip Resistance	D2047	.533	QAI Laboratories	04-12
Tensile Strength	D412 (Mpa)	.661	DTL	04-12
Elongation at Break	D412	68.5%	DTL	04-12
Tear Strength	D624 (kNm)	2.2	DTL	04-12
Peak Tear Load	D624 (N)	51	DTL	04-12
Flammability	D2859	Pass	DTL	04-12

#### PACKAGING INFORMATION

Thickness	Pcs/ Pallet (Plt)	Plt Weight Incl. Plt	Plt Height Incl. Plts
2.00" Standard	90	2340	36.00

*Weight of individual SofTILE Walkway Pad is 25 pounds.  
Additional thickness available on request.  
Each tile is manufactured to a nominal dimension of 24"X24".*

#### WARRANTY INFORMATION

Type	Summary Details
Manufacturing	• 10 Year



Distributed by Diamond Safety Concepts  
800-842-2914  
www.diamond-safety.com  
dsafety@sbcglobal.net

