

## Pop-lock™ tile system

PLT-C | PLT-R

# POP-LOCK™ TILES

a Millennium Molding, inc. Company



### Top-Quality Rubber Flooring Solution Patented Interlocking Recycled Rubber Tiles

Pop-lock™ tiles are made from recycled tire rubber and are ideal for decks, garages, gyms, walkways, and more. They offer reduced installation and maintenance costs, while enhancing safety and comfort in both residential and commercial spaces. The interlocking design allows individual tiles to be replaced easily, ensuring a durable, long-lasting, and cost-effective flooring solution.

# Pop-lock™ tile system

PLT-C | PLT-R

## INTERLOCKING DESIGN – NO GLUE OR FASTENERS REQUIRED



TILE EDGE - MALE SIDE



TILE EDGE - FEMALE SIDE



JOINED TILES



EDGING RAMP - MALE & FEMALE



COMMERCIAL TILE



RESIDENTIAL TILE

Pop-lock™ Interlocking Recycled Rubber Flooring Tiles are 24" x 24" x 1" athletic tiles featuring a patented interlocking-edge system—an industry-leading advancement in recycled rubber flooring.

This design connects tiles securely without adhesives or mechanical fasteners. Each edge includes an oval-shaped male ridge or matching female groove; when pressed together, they create a strong, shift-resistant

connection that can be joined or separated in seconds.

Pop-lock™ Sport/Fitness Tiles are ideal for home and commercial gyms, offering maximum impact absorption and excellent thermal and acoustic insulation. Their quick assembly and disassembly also make them well-suited for spaces requiring frequent reconfiguration, such as multi-purpose event facilities or garage-to-playroom conversions.

# Pop-lock™ tile specifications

PLT-C | PLT-R

Installed Size	24" x 24" (25" x 25" including the overlapping interlocking edges)
Density	60 pounds per cubic foot
Durometer	50 to 60 +-
Pigmented Colors	Black, Terra Cotta Red, Gray, Brown Blue, Green
Speckled EPDM Colors	20% White, 20% Tan, 20% Red (Custom Premium EPDM color mixtures in densities of 10% to 90%)
Color	Standard - All Black, inquire as to options
Warranty	Five-year limited warranty

Basic size	24" x 24" x 1" (+ - .0875)
Wear Index	657 average
Tear Strength Durability	124 lb. In. & psi average
Coefficient of Friction	approx. 0.80 Dry approx. 0.58 Wet
Thermal Conductivity	1.071 Btu-in./ (h-ft-F) average
Thermal Resistance	1.43 F-Ft h/Btu
Color	Standard - All Black, inquire as to options
Binder	Polyurethane Binder
Weight	Residential - 15 lbs Commercial - 19 - 20 lbs

## Pop-lock™ tile surfaces

PLT-C | PLT-R

# COMMERCIAL – RESIDENTIAL – GYM


### Turf top Pop-lock™ tile

Variety of tops:  
Turf, carpet or EPDM laminate



### Color top Pop-lock™ tile

Variety of tops:  
Grass, carpet or EPDM laminate.  
See color chart on page 6

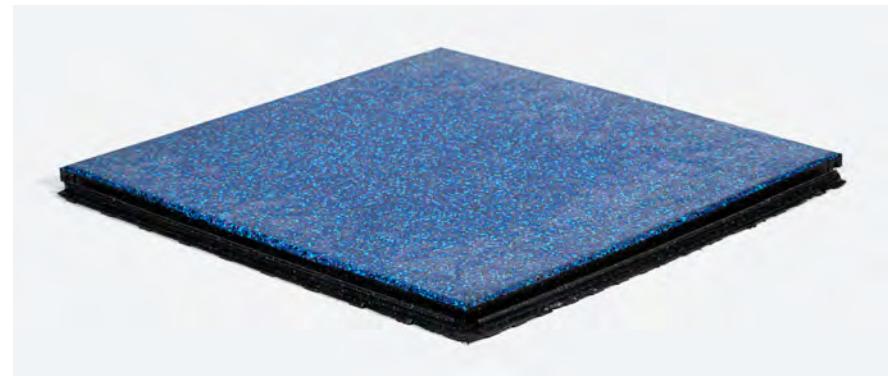

### Gym platform tiles

Commercial gym grade tiles with ADA transitions (all tiles lock together with our patented Pop-lock™ system).  
Variety of colors. See chart on page 6



# Pop-lock™ tile coloring

PLT-C | PLT-R

## Color Options

Pop-lock™ offers a range of standard colors, as well as custom specialty colors, with numerous color and size mix combinations available.



**Beige** 93



**Blue** 109



**Brown** 89



**Charcoal** 114



**Chrome** 110



**Cream** 98



**Gold** 88



**Green** 91



**Grey** 82



**Orange** 104




**Purple** 92



**Red** 96



**Spa** 85



**Teal** 100



**Terra** 80



**Yellow** 83



# Pop-lock™ tile care

PLT-C | PLT-R

## ROUTINE CLEANING AND INSPECTION

Recycled Rubber Tiles should be visually inspected and cleaned on an established interval. The frequency will depend on the environment and level of use.

Millennium Molding, Inc. recommends monthly inspections and cleaning intervals.

## CLEANING AND MAINTENANCE

### Standard Cleaning and Maintenance Options

- Sweep surface with a stiff bristle outdoor broom to remove larger debris and accumulated dirt and dust.
- Spray the surfacing with clean water using a standard hose to remove contaminants from the surfacing as well as the pores of the system.
- Vacuum the surface with a commercial grade vacuum to remove loose particles from the surface, transitions, joints and pores of the system.

## CLEANING STAINS

- Use mild cleaning soap with a soft bristle brush or mop to scrub the affected area.
- Use clean water to thoroughly rinse any area covered with soap residue.

## ANNUAL MAINTENANCE GUIDELINES

Remove any debris or other loose material.

Broom the entire surface of the system.

Vacuum the entire surface of the system.

- Spray the surface with clean water.
- Use a mild cleaning soap with a soft bristle or mop and scrub the surface in 5 ft x 5 ft sections. Thoroughly spray the affected area with clean water to remove any soap residue.
- Continue cleaning with mild soap and water until the entire surfacing system has been cleaned.

Distributed by Diamond Safety Concepts

1138 Lark Song Lane, Encinitas, CA 92024

[diamond-safety.com](http://diamond-safety.com) • 760-942-2914 • [info@diamond-safety.com](mailto:info@diamond-safety.com)

# Pop-lock™ tile warranty

PLT-C | PLT-R

## LIMITED WARRANTY ON MATERIAL

Millennium Molding, Inc (MMI) warrants to you, the original owner of the property that the MMI product, will comply with the technical specifications and be fit for those applications as set forth in the Manufacturer published technical and promotional materials at the time of sale and the product will be free from defects in materials and workmanship (subject to the limitations set forth below) for a period of ten (10) years from the date of purchase from the Manufacturer or its authorized dealer.

## MMI LIABILITIES

MMI's sole liability under this limited warranty shall be the repair or replacement, excluding installation, freight and other costs, at its options, of product strictly according to the procedure set forth below.

## EXCLUSIONS FROM COVERAGE

This limited warranty does not cover any of the following conditions:

- 1** Products which have been improperly installed
- 2** Products installed over improperly prepared sub-surfaces
- 3** Products installed over a sub-surface not specifically approved by the Manufacturer
- 4** Normal or excessive wear and tear of Product
- 5** Surface appearance or color of Product
- 6** Products subject to misuse, abuse, neglect, chemical cleaning or contact not specifically approved by Manufacturer

## NOTICE OF CLAIM

To exercise this limited warranty, Manufacturer must be notified within fifteen days of any occurrence giving rise to a claim and prior to installation, given the opportunity to inspect the Product, and have issued direction to the original purchaser respecting disposition of Product to be replaced under this limited warranty. Purchaser shall comply with all reasonable requests of Manufacturer in the administration of warranty claim.

## SOLE AND EXCLUSIVE WARRANTY

THIS LIMITED WARRANTY IS EXPRESSLY IN LIEU OF ANY OTHER GUARANTEE OR WARRANTIES, EXPRESS OR IMPLIED INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND OF ANY OTHER OBLIGATIONS OR LIABILITY OF MMI, WHETHER ANY CLAIM AGAINST IT IS BASED UPON STRICT LIABILITY, NEGLIGENCE, BREACH OF WARRANTY OR AN' OTHER THEORY. IN NO EVENT SHALL MMI BE LIABLE FOR THE CONSEQUENTIAL DAMAGES OF ANY KIND.